



EV Charging Solution

AC Charger / AC MAX – Basic

- Flexible 22 kW AC platform to cater for diverse charging application requirements
- Low standby power consumption for energy-saving
- Compact design with robust enclosure for indoor and outdoor environment



Commercial
Building



Parking



Residential
Area

Compact and Powerful – Liven up Home Charging


AC MAX Basic enables 3-phase charging up to 22 kW. The maximum charging power can be easily set to the available power capacity by adjusting the internal DIP-switches. With its compact, IP55 and IK09 rated design AC MAX Basic is the perfect solution for indoor and outdoor installations. The integrated key switch provides robust and easy-to-use access control system.

The plug and play design reduces installation and commissioning time. By supporting Over-the-Air (OTA) firmware update via Bluetooth, AC MAX Basic is the future-proof charging solution for residential applications.



Application Scenario

Charging Network




Mobile App

Mobile App access for remote control



Applications

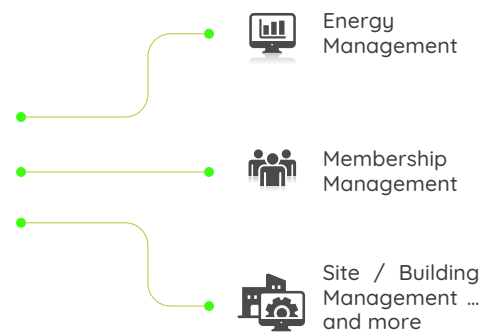

Feature Highlights



AC charger to optimize charging activity

- Three phase charging with 22 kW output power
- Extremely low standby power for energy-saving and cost optimization



Complete system integration for better charging services

- Interoperate with related business, service, and 3rd party applications



Compact design with robust enclosure

- Compact design: 218 × 371 × 167 mm
- All-weather protection: IP55 / IK09
- Optional wall mount or pedestal mount

Product at a Glance

Network Connectivity
Bluetooth

Key Switch



Charging Interface



IEC 62196-2 Type 2

Wiring

Bottom feed, Rear feed

Specifications

Model	AC MAX Basic	
Power Input	3.7 kW / 11 kW	7.4 kW / 22 kW
Nominal Current	16 A	32 A
Grid Connection	Single-phase electric power (L1, N, PE) Three-phase electric power (L1, L2, L3, N, PE) All AC MAX BASIC models support both single phase and three phase installations	
C Voltage	230 V / 400 V	
Frequency	50 Hz / 60 Hz	
Grounding Systems	TN, TT, IT	
Terminal	Terminal block	
Protection	Over current, Under voltage, Over voltage, Over temperature, Surge protection, Short circuit, Ground fault	
Standby Power	3.6 W	
Charging Output		
Nominal Power	Single-phase: 3.7 kW Three-phase: 11 kW	Single-phase: 7.4 kW Three-phase: 22 kW
Nominal Current	16 A per phase	32 A per phase
Connector Type	AC Type 2 Plug	AC Type 2 Plug AC Type 2 Socket AC Type 2 Socket with shutter
Charging Voltage	230 V / 400 V	
Cable Length	5 m (models with AC Type 2 Plug charging interface)	
Protection	RCD Type A (AC 30 mA), RDC-DD (DC 6 mA)	
Compliance	IEC 61851-1, IEC 62196-2, IEC61008-1, IEC 62955	
User Interface		
Display	Status LED, 4 colors	
Authentication	Key switch	
Charger Configuration	Maximum charging current selectable by 8-step hardware DIP switch	
Network Interface		
Bluetooth		
Protocols and Applications	Configuration, control, monitoring and firmware update	
Bluetooth		
Protocols and Applications	ModBus RTU for energy management	
Mechanical Properties		
Ingress Protection (IEC 60529)	IP55	
Impact Protection (IEC 62262)	IK09	
Cooling	Natural convection	
Dimensions* (W x H x D)	218 x 371 x 167 mm (8.6 x 14.6 x 6.6 inch)	
Weight*	6.0 kg (13.3 lbs), including charging cable	
Environmental Conditions		
Operating Temperature Range	- 30 °C to + 50 °C (- 22 °F to + 122 °F)	
Storage Temperature Range	- 40 °C to + 80 °C (- 40 °F to + 176 °F)	
Humidity	< 95 % relative humidity, non-condensing	
Altitude	Up to 2,000 m (6,500 ft.)	
Compliance		
EU Low Voltage Directive	IEC 61851-1, IEC 62479	
EU EMI Directive	EN 61000-3-11 / -12, IEC 61851-21-2	

* Product outlook depends on model configuration. Specifications are subject to change without notice.



Powerplus

France

1 Avenue Eiffel
78420 CARRIERES-SUR-SEINE
Telephone: +33 1 30 09 75 10
Fax: +33 1 30 09 75 20

contact@powerplus.fr

South Agency:
Telephone: +33 1 30 09 75 10
Central Branch:
Telephone: +33 6 72 80 45 48

Powerplus

Portugal

Quinta da Fonte, Rua dos
Malhões, D. Pedro I Building
2770-071 Paço de Arcos

Telephone: +351 21 000 8230
Fax: +351 21 000 1675

contact@powerplus.fr

Powerplus

Iberian

POWERPLUS SERVICE CENTER
IBERICA

Business Reception Area, Union
of parishes of Trancoso (Sao
Pedro and Santa Maria)
6420-242 TRANCOSO

Telephone: +351 91 421 9154

contact@powerplus.fr

Who are we ?

The company POWERPLUS offers turnkey solutions in the area of electrical energy, air conditioning, emergency and electrical protection.

The POWERPLUS company was born from a simple and practical observation: few companies are capable of providing complete solutions in these areas of activity.

The founders and speakers bring over 20 years of technical experience and expertise to offer you a high-quality service. We carefully choose products from reputable and innovative brands, which allow you to commit to sustainability. Furthermore, we support you daily with maintenance, rental and financing services adapted to your operational constraints.

A logistics platform that guarantees deliveries within 24 to 48 hours.